

CL-700-XSR

Benefits:

- Reduced fading of interior furnishings by screening out harmful UV rays
- Increased safety by helping hold shattered glass together
- Clear, non-tinted appearance
- Improved security by creating a deterrent to forced entry
- Scratch -resistant

Performance Data:

Total Solar Energy:

Transmitted	76%
Reflected	10%
Absorbed	15%

Visible Light:

Transmitted	84%
Reflected	10%

"U" Factor:

Median	1.08
Design	1.12

Ultra Violet Light Rejected	99%
------------------------------------	------------


Shading Coefficient	.93
---------------------	-----

Total Solar Energy Rejected	19%
------------------------------------	------------

Physical Properties:

Film Thickness	.007"
Structure	Single Ply
Tensile Strength	32,000 PSI Average MD/TD
Break Strength	175 Pounds Per Inch (Width)
Adhesive Type	Acrylic Pressure Sensitive
Peel Strength	5 to 6 Pounds Per Inch

MADICO PROTEKT® FILM

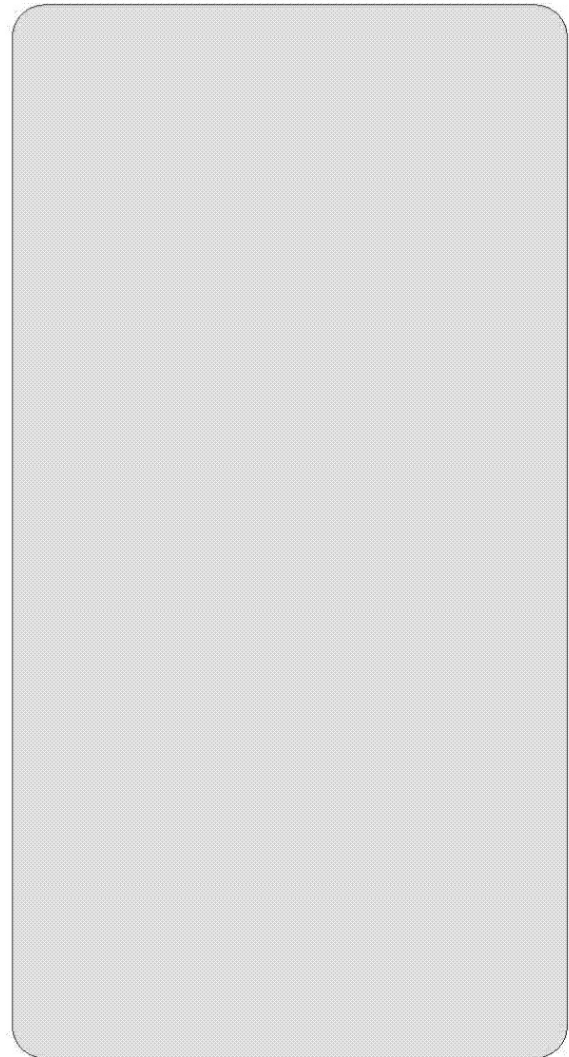

ISO 9001: 2000 Certified

45 Industrial Parkway, Woburn, MA 0180 • 800-225-1926 • www.madico.com



Since only the user is aware of the specific condition in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use. If the specific conditions of use are critically dependent on any of the properties of the product, or if you need further information of any sort, contact Madico or your local Madico window film dealer.

V-9404-RO3