

# LCL - 1400-XSR

## MADICO PROTEKT® FILM

### Benefits:

- Reduced fading of interior furnishings by screening out destructive UV rays
- Increased safety by helping hold shattered glass together
- Clear, non-tinted appearance
- Improved security by creating a deterrent to forced entry
- Scratch -resistant

### Performance Data:

#### Total Solar Energy:

Transmitted	74%
Reflected	10%
Absorbed	16%

#### Visible Light:

Transmitted	82%
Reflected	9%

#### "U" Factor:

Median	1.08
Design	1.12


Ultra Violet Light Rejected	99%
-----------------------------	-----

Shading Coefficient	.92
---------------------	-----

Total Solar Energy Rejected	20%
-----------------------------	-----

### Physical Properties:

Film Thickness	.014"
Structure	Multi-Ply Laminate
Tensile Strength	32,000 PSI (MD/TD)
Break Strength	350 Pounds Per Inch (Width)
Adhesive Type	Acrylic Pressure Sensitive
Peel Strength	5 to 6 Pounds Per Inch

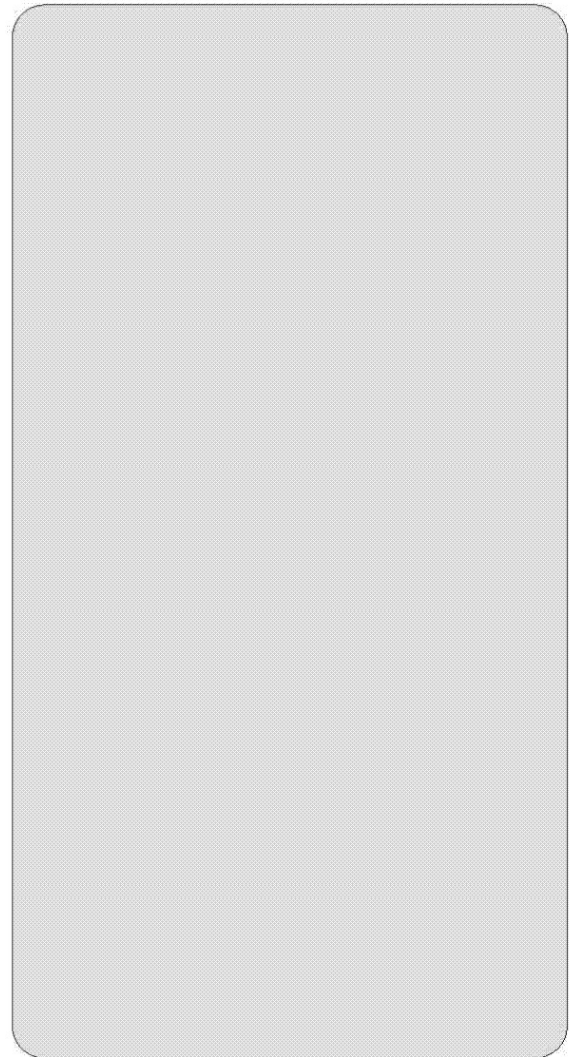

45 Industrial Parkway, Woburn, MA 01801 • 800-225-1926 • [www.madico.com](http://www.madico.com)

Since only the user is aware of the specific condition in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use. If the specific conditions of use are critically dependent on any of the properties of the product, or if you need further information of any sort, contact Madico or your local Madico window film dealer.

